

LIBERATE

PENETRANT

Contains PTFE & Moly for High Pressure Performance & Decreased Metal Wear

Clinging Formula for Improved Lubricity & Coverage

Does not Contain Silicone or Chlorinated Solvents

Use for Extreme Applications


Displaces Moisture

Safe on Most Surfaces

Leaves a Lasting Corrosion Barrier

5612 LIBERATE

12 - 16 oz cans/case

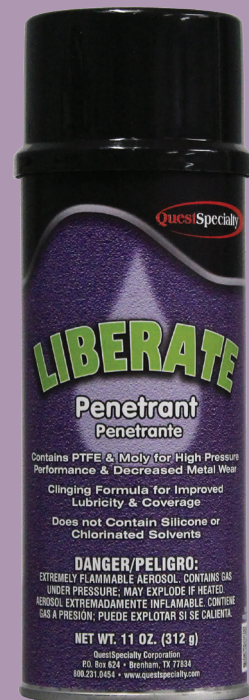

This super penetrant carries the PTFE and molybdenum disulfide particles into the threads, crevices, etc. These particles act as millions of tiny ball bearings to prevent seizing and galling while the parts are being removed. This product is designed to be used on all dismantling jobs throughout the plant, shop or wherever parts are frozen or hard to operate. Quickly loosens corroded nuts, studs, bolts, flanges and pipe joints. Does not contain silicone or chlorinated solvents. Heat stability up to 600° F or 1300° F when used in an oxygen free environment.

Scan QR Code For
Product Info!



Come Find Us on
Social Media!

