




Moli-Guard

DRY LUBRICANT SPRAY

Reduces Friction – Retards Wear
Temperature Range -40°F to +600°F
Molybdenum Disulfide & Graphite

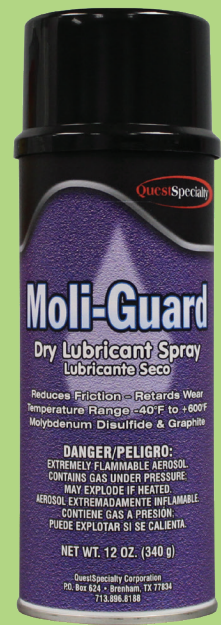

5440 MOLI-GUARD
12 - 16 oz aerosol cans/case

Resists dust and abrasive particles
Withstands water, oils, alkalies, and most acids

FOR USE ON:
*Chain and sprocket lubrication, machine shops, lathe bed and rails,
door locks and hinges, reduction of sliding friction, release agent.*

Scan QR Code For
Product Info!



Come Find Us on
Social Media!



P.O. Box 624
Brenham, TX 77834
800.231.0454
www.questspecialty.com